

19" High Quality Export Rack

Characteristics of the 19" High Quality Export Rack

- **Design:** 19" High Quality Export Rack is designed and produced to be the Modular Knock-down System which is very easy to assemble.
- **Material:** The rack is made of 1.5 mm Electro-Galvanized steel Sheet which is a thick, durable and 100% rustproof material.
- **Frame:** Vertical Mounted Frame is made of 2.0 mm Electro-Galvanized Steel Sheet which is a thick, durable and 100% rustproof material. It can be adjusted depending on the depth of the rack as requirement.
- **Base:** A base of the rack is made of 2.0 mm Electro-Galvanized Steel Sheet and a base for casters is made of 3.0 mm Electro-Galvanized Steel Sheet which are thick, durable and 100% rustproof.
- **Roof:** The roof of the rack can be installed ventilating fan from 1 unit to 6 units. It can be used to put cables through the hole or can be designed as a high-roof. (Optional)
- **Light Built-in:** The inside of the rack can be installed a PL-7w light and a limit switch and the light will switch on-off automatically when the rear doors is opened and closed. (Optional)
- **Front Door:** The front door is 5 mm-transparency brown acrylic plastic which is thick and lightweight. It has a seal on the edge of the door to prevent dust. The front door has Aluminum hinges and turn-locks for security. It can be set to right swing open or left swing open.
- **Rear Door:** The rear door is perforated for ventilation at the bottom of the rear door and has a dust-proof filter for covering. It has a seal on the edge of the door to prevent dust. The rear door has Aluminum hinges and push-locks for security. The door can be set to right swing open or left swing open.
- **Bottom Rack:** The bottom rack can put cables through the hole and has a slide shutter to protect animals. It can be added a ventilating fan. (Optional)
- **Side Panel:** The side panel secures with two turn-locks and it is convenient to maintain.
- **Hinges:** The black hinges of the front-rear door are made of Aluminum which is heavy-duty and 100% rustproof.
- **Stands:** The rack has four stands which are easy to adjust as requirement.
- **Casters:** The rack has four casters which are made of White Nylon Six. The casters can turn around 360 degree a and load 100 Kg./caster.
- **Ground System:** There is the Ground System all parts of the rack with the earth cable kit.
- **Color:** The rack is a two-tone (light gray and dark gray) which is coated with powder epoxy by Electro-Static System for strength.
- **Accessories:** The rack is designed to provide customers with M6 bolts, cage nuts and plastic washers.
- **Quality Product Standard:** The racks meet quality product standards which are ANIS/EIA-310D-1992 (Rev.EIA-310-C), IEC 60297-1, IEC 60297-2, BS 5954: Part 2, DIN 41494.
- **Manufacturing standard:** ISO 9001: 2000 Company

19" High Quality Export Rack

u	Height (mm.)	Height effective (mm.)	Order NO. (Width* x Depth* : mm.)				
1U = 44.45 mm.	H	h	600x600	600x800	600x900	600x1000	600x1100
15U	850	670	PM-6615	PM-6815	-	-	-
27U	1390	1200	PM-6627	PM-6827	PM-6927	PM-6027	-
36U	1790	1600	PM-6636	PM-6836	PM-6936	PM-6036	-
39U	1915	1735	PM-6639	PM-6839	PM-6939	PM-6039	-
42U	2050	1870	PM-6642	PM-6842	PM-6942	PM-6042	PM-6142
45U	2185	2000	PM-6645	PM-6845	PM-6945	PM-6045	PM-6145

Remark: Width* = Require 800 mm. in width, please contact distributor.

Depth* = Not include the Depth of the front door and the rear door.

Illustration




Front View



Side View



Rear View

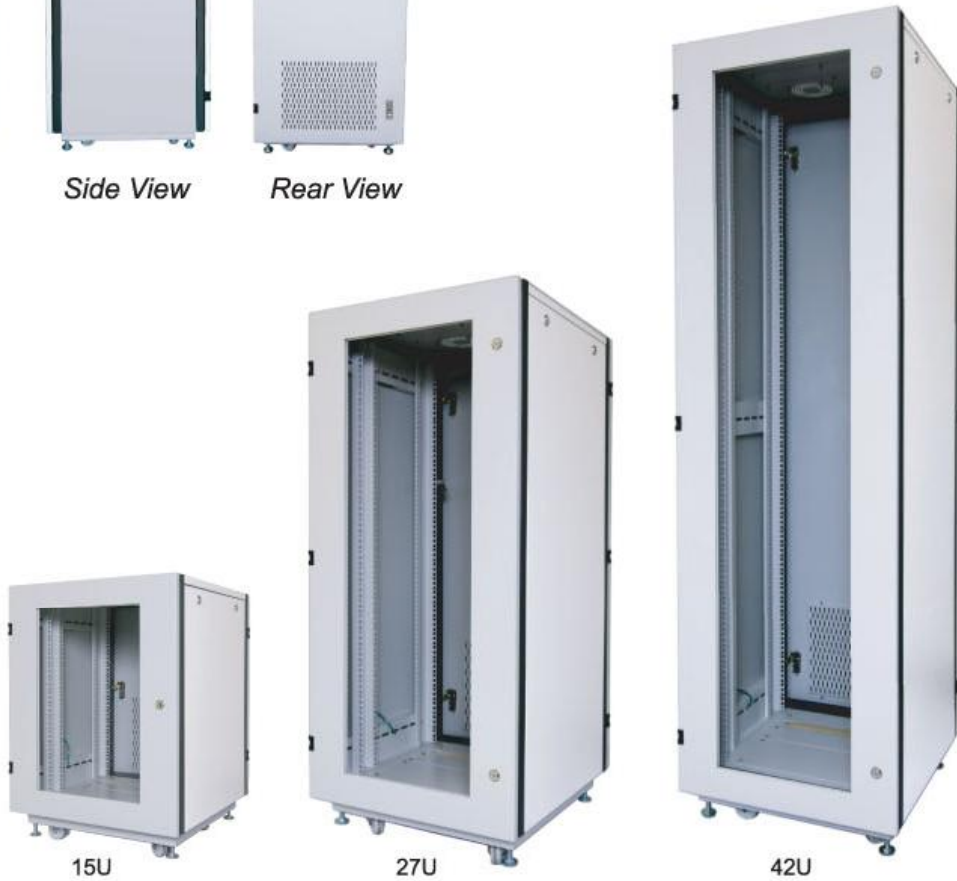

15U

27U

42U

Remark:

H = Height, h =Height Effective,
 W =Width, D =Depth

